DUAL TEMP REFRIGERATOR/FREEZER

Model: 1RF-HD

1-Section Over/Under Dual Temp Reach-In Refrigerator/Freezer (0°F)

1RF-HD - Stainless steel front, aluminum end panels and interior

1RF-SA-HD - Stainless steel exterior, aluminum interior

1RF-SS-HD - Stainless steel exterior and interior

Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Shallow depth (consult factory)
Add'l epoxy-coated steel shelves	Hinged glass doors
Chrome or stainless steel shelves	Increased refrigeration systems
Heavy-duty pilaster strips	Special electrical req. (consult factory)
Rehinging of doors (consult factory)	Correctional Facility Options
Expansion valve system	One way security screws
Wine display (refrigerator section)	Locking hasp (lock not included)
Adjustable legs	Stainless steel mesh cover
Custom laminates	Coverless hinges
Pan slide assemblies	

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:		
Model Cresified		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant (refrigerator)

Environmentally-safe R-404A refrigerant (freezer)

Separate, self contained, performance-rated refrigeration systems

Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in door

Heavy-duty, epoxy-coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

Electronic controllers w/digital display & hi-low alarm

Automatic electric defrost (freezer section)

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	10/10 (283/283 cu I)
Width, Overall (in.)	26 (660 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth [less doors] (in.)	32 (813 mm)
Depth [doors open 90°] (in.)	55 1/2 (1410 mm)
Clear Door Width (in.)	19 3/8 (492 mm)
Clear Half Door Height (in.)	27 1/2 (699 mm)
Height, Overall (in.) (incl. 5" casters)	82 1/4 (2089 mm)
No. of Doors	2
No. of Shelves	4
Shelf Area (sq. ft.)	20.4 (1.9 sq m)
Tray Slide Capacity (per half section)	11
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/5, 1/4
Capacity (BTU/Hr)*	1725 / 1250
ELECTRICAL DATA	

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3/3
Total Amps (int'l)	5.5 (3.1) / 4.8 (2.9)

Defrost Amps (int'l) 5.2 (2.6) (2) 10 ft. Cord/Plug [attach.] (int'l) Yes (No)


SHIPPING DATA


SHIFFING DATA	
Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	31 5/8 (803 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	65 (1841 cu I)
Weight Std - Crated (lbs.)	420 (191 kg)
Weight SS - Crated (lbs.)	480 (218 kg)
Weight Std - Uncrated (lbs.)	320 (145 kg)
Weight SS - Uncrated (lbs.)	380 (172 kg)

^{*} Rating @ +25°F evaporator, 90°F ambient (refrigerator) * Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

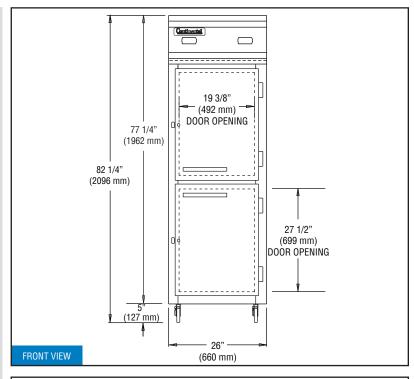

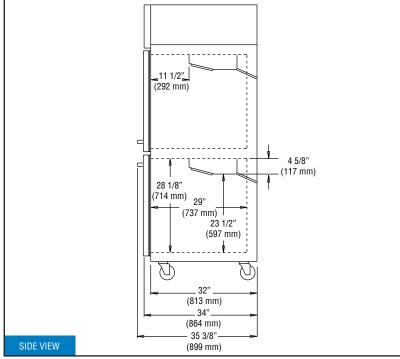

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







© Copyright 2018. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.



Equipped with two NEMA-5-15P Plugs (varies by country)