PIZZA PREPARATION TABLE

Model: CPA68-D

68" Pizza Preparation Refrigerator with Drawers and Half Door

Heavy gauge #300 series stainless steel top, stainless steel front and end panels, aluminum interior.

Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel interior	Wire rod garnish rack
Stainless steel back	Vision panel lid
Overshelves	Door/drawer locks
Doors in lieu of drawers	Adjustable legs
Drawer in lieu of half door above the condensing unit*	Front breathing
Condensing unit left or right	Special electrical requirements (consult factory)

^{*}Drawer section above condensing unit holds (1) $12 \times 20 \times 6$ pan

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system

Environmentally-safe R-134a refrigerant

Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold

Automatic, electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, slide-out condensing unit

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Spring loaded, self closing door (above condensing unit)

Magnetic snap-in door/drawer gaskets

Stainless steel roll-out drawers

19" deep, full length nylon cutting board

Refrigerated section w/door above the condensing unit

Insulated lid

5" casters

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm

Ergonomically-friendly raised angle rail

Expansion valve for quick recovery

Built-in, off cycle defrost timer assures optimum coil defrost

Field rehingeable door (above condensing unit)

NOTE: CPA-D models come standard with a door above the condensing unit. A drawer above the condensing unit is an option.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

DIMENSIONAL DATA

Net Capacity (cu. ft.)	22 (623 cu l)
Width, Overall (in.)	68 (1727 mm)
Depth, Overall (in.) (incl. cutting board & bumpers)	36 7/8 (937 mm)
Height, Overall (in.) (incl. 5" casters)	39 7/16 (1002 mm)
Depth, Cutting Board (in.)	19 (483 mm)
Pan Capacity (pans supplied by others)	(9) 1/3
No. of Drawers	4
No. of Half Doors	1
Interior Height (in.) (above condenser)	12 1/2 (318 mm)
REFRIGERANT DATA	

Capacity (BTU/Hr)* ELECTRICAL DATA

Condensing Unit Size (H.P.)

Voltage (int'l)	115/60/1 (220/50/1)
Fans	5
Total Amps (int'l)	13.7 (8.8)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

1/2

4220

SHIPPING DATA

Weight (lbs.)	495 (225 kg)
Height - Crated (in.)	43 3/4 (1111 mm)
Width - Crated (in.)	70 (1778 mm)
Depth - Crated (in.)	47 (1194 mm)

DRAWER PAN CONFIGURATIONS

Two Tier: (2) 12 x 20 x 6 pans per drawer

Three Tier: (1) $12 \times 20 \times 4$ pan per drawer (top) and (2) $12 \times 20 \times 4$ pans per drawer (center & bottom)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.








© Copyright 2018. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

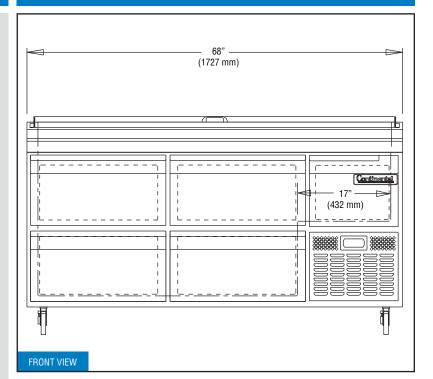

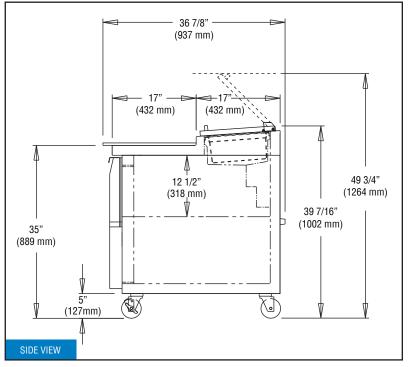

IMPORTANT NOTE: If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required</u> on sides, front and rear.

^{*} Rating @ +25°F evaporator, 90°F ambient