



# 911/911P Deck Oven



### OPTIONS AND ACCESSORIES

(AT ADDITIONAL CHARGE)

- Flexible gas hose with quick disconnect and restraining device:
  - 36" (914 mm)
  - 48" (1219mm)
- Black legs with casters
- Stainless steel crown angle trim
- Vent kit
- 911 - QHT Rokite shelves, 1" (25.4mm) thick (pizza type shelf)
- Steam jets
- 911 - FDTH 300°F (149°C) to 650°F (343°C) Temperature thermostat

### OPTIONS AND ACCESSORIES

(AT NO CHARGE)

- Centigrade dial, 100°C to 300°C



Intertek



Project \_\_\_\_\_

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

Ovens consist of basic sections and are a complete and separate unit capable of operating alone or in combination.

All data is shown per oven section, unless otherwise indicated.

Refer to operator manual specification chart for listed model names.

### EXTERIOR CONSTRUCTION

- Full angle iron frame
- Stainless steel front, top, sides and back
- Counterbalanced doors with concealed hinges
- Heavy chrome plated tubular steel door handle
- 27-1/2" (699mm) stainless steel legs (for single units)
- 19" (483mm) stainless steel legs (for double units)
- 7" (179mm) stainless steel legs (for triple units)
- Burner doors open easily for ignition, cleaning or adjustment, without removal of any fastenings
- Vitreous fiber insulation at top, back, sides, bottom and doors

### INTERIOR CONSTRUCTION

- 33" x 22" x 7" (838mm x 559mm X 178mm) oven compartment interior
- Aluminized steel baking compartment liner
- Aluminized steel combustion chamber
- Deck supported by an angle iron frame
- 12 gauge (3.02mm) press-formed, reinforced and flanged aluminized steel deck

### OPERATION

- Free-floating, easily removable duplex-tube burner
- Removable fixed orifices on main and pilot burner
- Main gas valve, temperature control valve and safety pilot valve fully within section body and are accessible through a covered and ventilated compartment in front
- Air mixers with adjustable air shutters and locking device
- 911 - Liquid pressure thermostat with temperature range of 200°F (93°C) to 500°F (288°C)
- 911P - Liquid pressure thermostat with temperature range of 300°F (149°C) to 650°F (343°C)

### STANDARD FEATURES

- 911 - Fahrenheit dial 200° to 500°
- 911P - Fahrenheit dial 300° to 650°
- 911 - Steel oven deck
- 911P - QHT (Quick Heat Technology) Rokite deck
- Gas connector for double stack ovens only
- Two year parts and one year labor warranty
- Five year limited oven door warranty\*

\* For all international markets, contact your local distributor.


911/911P

### BLODGETT OVEN COMPANY


www.blodgett.com • 42 Allen Martin Drive, Essex Junction, VT 05452 • Phone: (802) 658-6600 • Fax: (802) 864-0183



# 911/911P

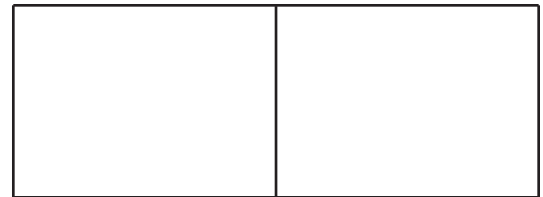

APPROVAL/STAMP

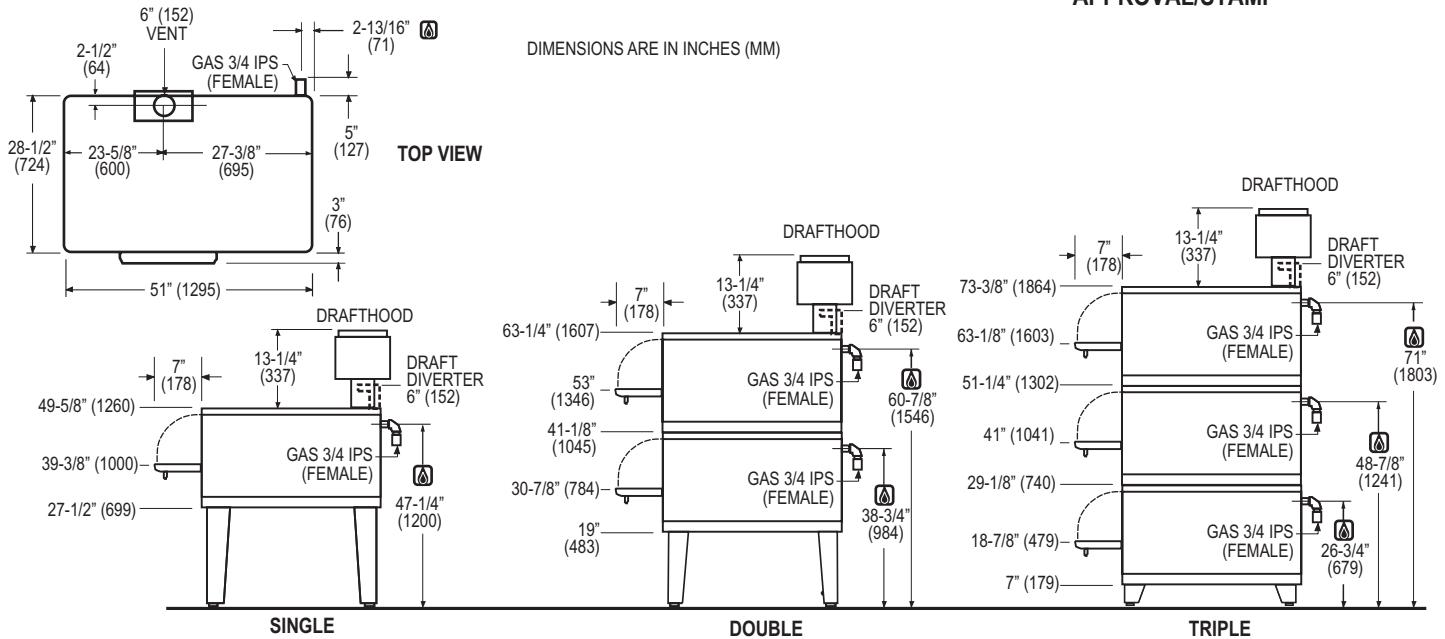

**SHORT FORM SPECIFICATIONS** Provide Blodgett single deck oven, model 911. Construction shall be stainless steel on front, top, back and sides, and shall be fully insulated on all sides. Oven shall be supported by formed adjustable legs. Door(s) shall be counterbalanced (no springs) with concealed hinges and chrome plated tubular steel handles. Separate burner door provided for ignition, cleaning and adjustment. Each baking compartment shall be 33" W x 7" H x 22" D and shall be lined with aluminized steel. Deck shall be 11 gauge press-formed, reinforced and flanged steel (911) or QHT Rokite (911-P). Unit shall be gas heated by a free-floating, easily removable, duplex-type burner controlled by a liquid pressure thermostat with range of 200°F to 500°F (911) or 300°F to 650°F (911P). Each compartment provided with flue vent. Provide with two year oven parts and one year labor warranty. Provide with options and accessories as indicated

## DIMENSIONS:

|                           | Single   | Double | Triple |
|---------------------------|--|--------|--------|
| Number of sections:       | 1  | 2      | 3      |
| Number of controls:       | 1  | 2      | 3      |
| Number of compartments:   | 1  | 2      | 3      |
| Size of compartment:      | 33" (838mm) W x 7" (178mm) H x 22" (559mm) D         |        |        |
| Area of each compartment: | 5.04 sq. ft. (0.47m <sup>2</sup> )                   |        |        |
| Total area of oven:       | 5.04 sq. ft. (0.47m <sup>2</sup> )                   |        |        |
| Clearance below oven:     | 26-1/8" (664mm)                                      |        |        |
| Floor space:              | 51" (1495mm) wide x 30" (762mm) deep                 |        |        |
| Product clearance:        | 6" from combustible and non-combustible construction |        |        |

## GAS SUPPLY:

3/4" IPS connection at rear of oven  
 Manifold Pressure:  
 • Natural – 5" W.C. • Propane – 10" W.C.  
 Inlet Pressure:  
 • Natural – 7.0" W.C. min. – 10.5" W.C. max.  
 • Propane – 11.0" W.C. min. – 13.0" W.C. max.

## MAXIMUM INPUT:

|        | 911           | 911P          |
|--------|---------------|---------------|
| Single | 20,000 BTU/hr | 27,000 BTU/hr |
| Double | 40,000 BTU/hr | 54,000 BTU/hr |
| Triple | 60,000 BTU/hr | 81,000 BTU/hr |

## MINIMUM ENTRY CLEARANCE:

Uncrated 23-1/4" (591MM)  
 Crated 27" (686mm)

## SHIPPING INFORMATION:

| Approx. Weight:     | 911   | 911P              |
|---------------------|---|-------------------|
| Single              | 495 lbs. (225kg)                            | 585 lbs. (265kg)  |
| Double              | 905 lbs. (410kg)                            | 1130 lbs. (512kg) |
| Triple              | 1285 lbs. (583kg)                           | 1640 lbs. (744kg) |
| <b>Crate sizes:</b> | 56" (1422mm) x 46.5" (1181mm) x 27" (686mm) |                   |

## PAN CAPACITIES:

|   | Single | Double | Triple |
|---|--------|--------|--------|
| 10" (254mm) pie tins:                   | 6      | 12     | 18     |
| 18" x 26" (457mm x 660mm) bun pans:     | 1      | 2      | 3      |
| 9-1/2" x 5" (241mm x 127mm) bread pans: | 12     | 24     | 36     |
| 9" x 7" (228mm x 178mm) roll pans:      | 9      | 18     | 27     |
| 19" x 4" (483mm x 102mm) pullman pans:  | 8      | 16     | 24     |
| 13" x 16-1/2" (330mm x 419mm) cup tins: | 2      | 4      | 6      |
| 20" x 28" (508mm x 711mm) roast pans:   | 1      | 2      | 3      |
| No. 200 pans (324mm x 527mm):           | 2      | 4      | 6      |
| Bean pots: #1:                          | 15     | 30     | 45     |
| #3:                                     | 8      | 16     | 24     |
| #6:                                     | 6      | 12     | 18     |

**NOTE:** The company reserves the right to make substitutions of components without prior notice

## BLODGETT OVEN COMPANY

www.blodgett.com • 42 Allen Martin Drive, Essex Junction, VT 05452 • Phone: (802) 658-6600 • Fax: (802) 864-0183