



FS-1500MLJ-C

SERENITY SERIES CUBELET ICE MACHINE



FS-1500MLJ-C
01/11/19
Item # 13282

Modular Head Unit
W x D x H
30" x 16 1/2" x 33"

Remote Unit Dimension
SRC-14J
35 3/4" x 23 1/2" x 22"

Installation Dimension*
SRC-14J
38" x 29" x 37"

*Dimensions include legs




FS-1500MLJ-C
Remote Air-Cooled
Shown on Lancer Sensation
30" Dispenser



Item #: _____
Project: _____
Qty: _____
AIA#: _____

Features

- ▶ Durable stainless steel exterior
- ▶ Advanced CleanCycle24™ design 
- ▶ Stainless steel auger with greaseless bearing

- Up to 1386 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- EverCheck™ alert system
- Less heat in the kitchen
- Minimized noise
- 2-second flush cycle every hour
- Flush cycle removes sediment for cleaner ice
- Slim depth - easier to clean dispenser
- Front and back serviceability
- 8 ft. power cord with NEMA 5-15P plug
- R-404A Refrigerant

Warranty:

3 Year Parts & Labor on entire machine. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Shipping: (LxWxH) 35" x 23.25" x 39.5" Volume: 12.25ft³


		ICE PRODUCTION		WATER USAGE		ELECTRICAL					
Condenser	Model	Air / Water Temp Lbs. per 24 hours 70°/ 50°F 90°/ 70°F		Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Amperage	Voltage	Circuit Wires (including ground)	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
Remote	FS-1500MLJ-C	1386	1125	12.0	N/A	4.75	3.6A	115V/60/1 *	See remote condenser	3.5 oz.	182/222

		LINE SETS - Brazing Required			TEMP RANGE	ELECTRICAL							
Condenser	Model	25' Length	35' Length	55' Length	Ambient (Outdoor Use)	Voltage Range	Min. Circuit Amp - Max. Fuse/Breaker	Amperage	Voltage	Circuit Wires (including ground)	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
Remote	SRC-14J	HS-5323†	HS-5324†	HS-5325†	-4° - 122°	187-253VAC	20A	10.1A	208-230V/60/1	4	15,300	10 lb. 12.8 oz.	190 /235

† Line sets require refrigerant. Refer to instruction manual for installation and electrical requirements. See instruction manual for wiring diagram.

Power cord included.

Cubelet Cube Dimensions*



* approximate size in inches, image not to scale

Operating Limits FS-1500MLJ-C

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104-127V*

Service FS-1500MLJ-C

- Allow 6" (15 cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance/service.
- Allow 24" (61 cm) clearance on left side for removal of cube guides
- Panels easily removed and all components accessible for service.

Plumbing FS-1500MLJ-C

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Service- SRC-14J

- Allow 24" (61 cm) clearance in both front and rear for proper air circulation and ease of maintenance/service.
- For best performance the Remote Condenser should not be more than 33 feet above the icemaker or no more than 10 feet below it. These distances are measure from fitting to fitting.




FS-1500MLJ-C

SERENITY SERIES CUBELET ICE MACHINE




FS-1500MLJ-C
01/11/19
Item # 13282

FRONT VIEW

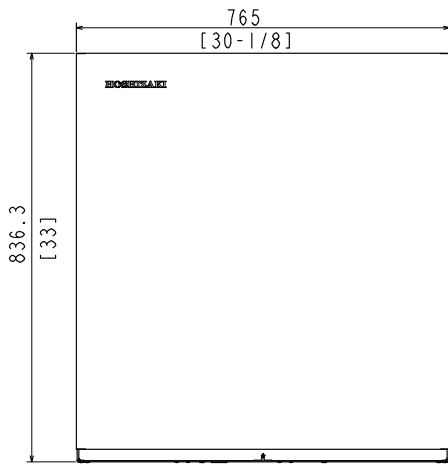


FS-1500MLJ-C

SIDE VIEW

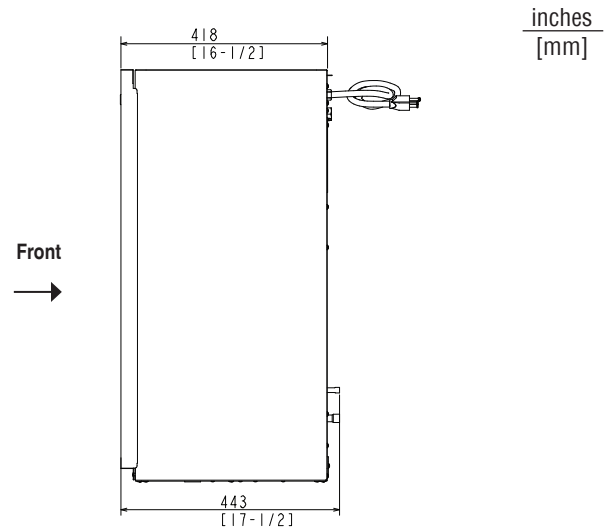


REAR VIEW

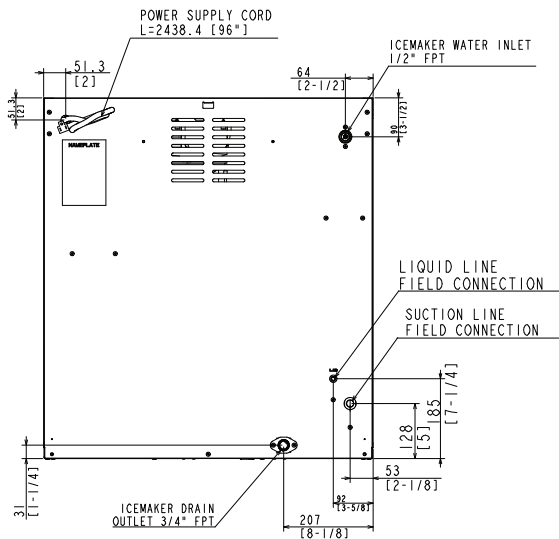


FS-1500MLJ-C

FRONT VIEW

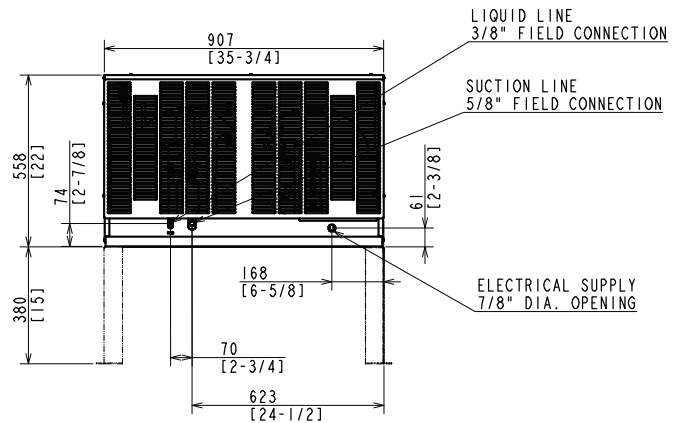

SRK-14J Remote Condenser

BOTTOM VIEW

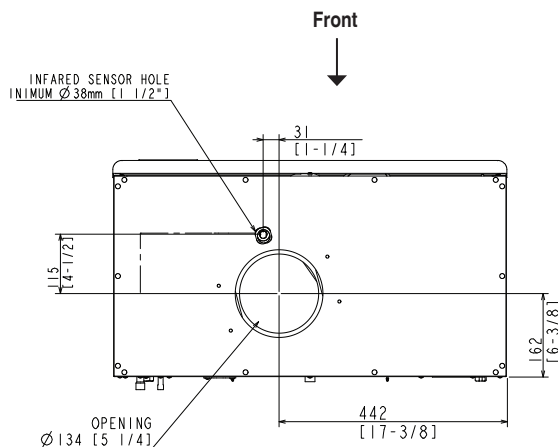

FS-1500MLJ-C



Braided Line Sets
(Sold Separately)

25' HS-5323

35' HS-5324

55' HS-5325

Voltage supply for the FS Ice Maker
is supplied from the SRC Remote Condenser.

SRC-14J Remote Condenser (Sold Separately)
(W x D x H) 37 3/4 x 26 5/8 x 37 (including legs)
For Use with FS-1500MLJ-C

