


Model Numbers  
ICMA-36-E



Chrome plated heavy duty rack.



Durable cast aluminum control knobs with a heat protection, vylox grip.



ICMA-36-E

**ELECTRIC ELEMENT** - Two 3 KW incoloy heating elements.

- Control knobs are durable cast aluminum with cool-to-the-touch grip.
- Independent left and right heating zones maximize function and performance.
- 208 and 240 volts, 3 phase operation.

**BROILER RACK** - Chrome plated heavy duty rack.

- Loads and unloads easily.
- Full width, large capacity for high production in peak hours.
- Rack easily lifts out for cleaning.




**EXTERIOR FEATURES** - Constructed using aluminized steel for maximum heat retention and heat distribution.

- Stainless steel front, sides and top.
- Welded and polished stainless steel seams.
- Mounts over IR and IHR Imperial ranges with mounting accessory.
- Can be wall or counter mounted.
- One year parts and labor warranty.



# ELECTRIC BROILER CHEESEMELTER

# IMPERIAL®

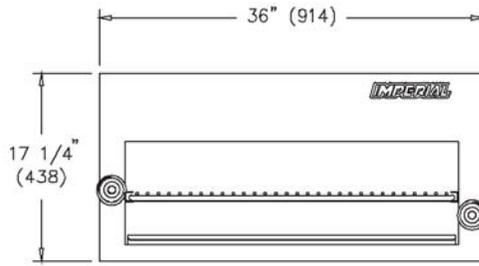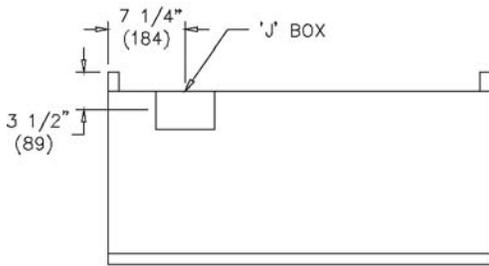

## ELECTRIC CHEESEMELTER BROILER

MODEL	WIDTH		ELEMENTS		SHIP WEIGHT	
	INCHES	(MM)	KW	NUMBER OF	(KG)	LBS
ICMA-36-E	36"	(914)	3 KW each	2	(75)	162

Measurements in ( ) are metric equivalents.

MODEL	DIMENSIONS	CRATED DIMENSIONS
ICMA-36-E	36" w x 17-3/4" d x 17-1/4" h (914 x 451 x 438 mm)	38" w x 20" d x 21" h (965 x 508 x 533 mm)

### 36" WIDE RANGES ELECTRICAL REQUIREMENTS

Model	Total KW	Volts	Ph	Amps
ICMA-36-E	6	208	3	17
	6	240	3	14

### OPTIONS AND ACCESSORIES

- Wall mounting kit
- 4" (102 mm) leg kit for counter mounting
- Reinforcement channels for range mount

### CLEARANCE REQUIREMENTS

For use only on non-combustible surfaces. Legs are required for counter top installation. Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.



1128 Sherborn Street Corona, CA 92879  
800.343.7790 Ph: 951.281.1830 Fx: 951.281.1879  
www.imperialrange.com  
E-mail: imperialsales@imperialrange.com